AGRIVIVE / BIJAPOD

ANDHRA PRADESH / A3 APPROVAL SAMPLE

SERIES 01 / 28

A3 / PRELIMINARY / ALL DIMENSIONS mm




FROM BEEJAMRUTHAM TO BIJAPOD

Andhra Pradesh Community Managed Natural Farming uses Beejamrutham to treat seed before sowing.
BIJAPOD adapts the seed-care idea into a removable cup beside a water cavity; the device is a proposal for trials.

Practice: apcnf.in/how-natural-farming-works-3/ | State outline: geoBoundaries gbOpen / schematic


01 INSTALLED SOIL SECTION

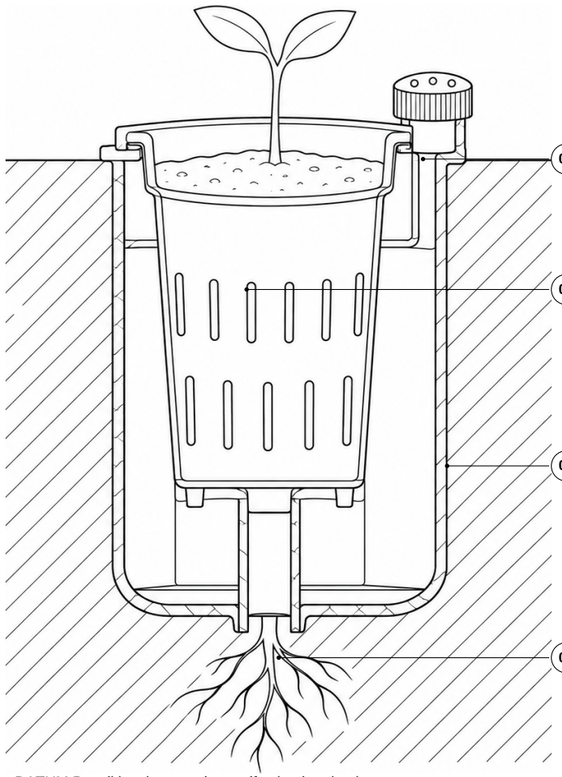

DATUM B: soil level at cup rim; verify planting depth.
Root / drain passage must remain open to soil.


64 OD x 110 H / proposed envelope

02 EXPLODED ASSEMBLY

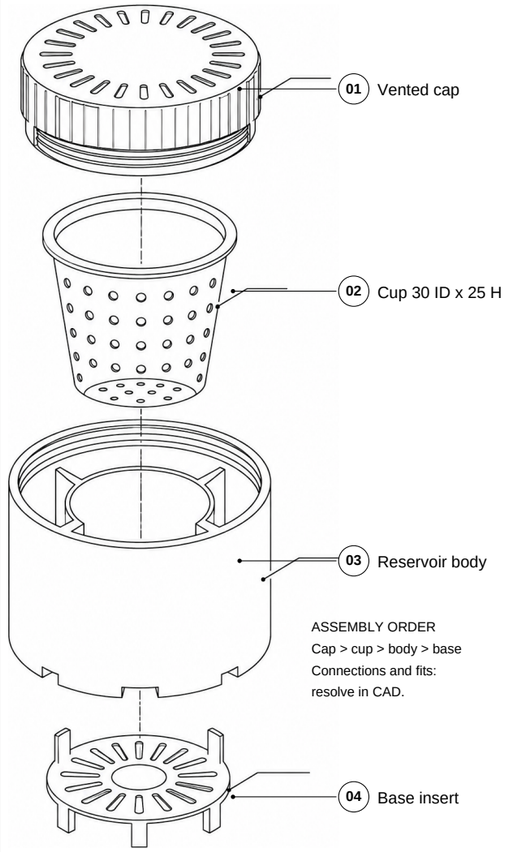

ASSEMBLY ORDER
Cap > cup > body > base
Connections and fits:
resolve in CAD.

04 INTERNAL SECTION / NOMINAL mm

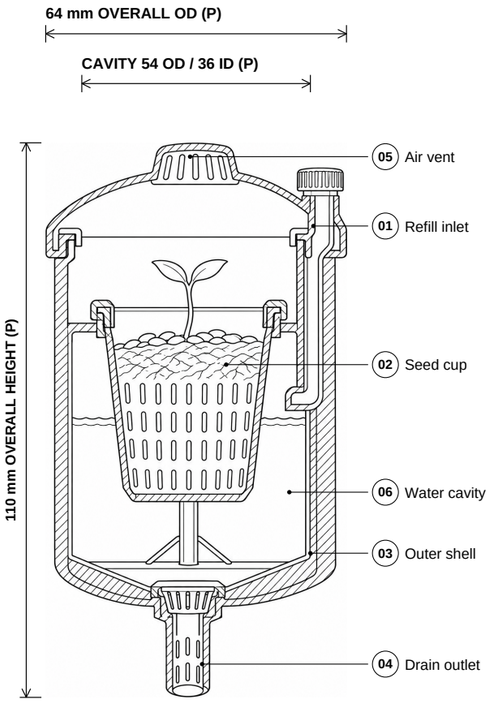

Cup: 30 ID x 25 H. Cavity effective height: 50.
(P) = preliminary design intent / NTS.
Shape and interfaces require CAD development.
Candidate fit: cup OD32 / well ID34 mm (P).

DESIGN / INTERFACE SCHEDULE

01 NOMINAL GEOMETRY / mm

Overall OD x height	**64 x 110**
Cup ID x clear height	**30 x 25**
Cavity OD / ID	**54 / 36**
Effective cavity height	**50**

02 RESERVOIR CAPACITY

63.6 mL GROSS

pi/4 x (54^2 - 36^2) x 50 / 1000
Usable volume excludes solid intrusions.

03 COMPONENTS / QTY

01 Vented cap	**1**
02 Removable cup	**1**
03 Reservoir body	**1**
04 Root / drain base	**1**

05 vent / 06 cavity: integral features.
Material: proposed polymer; grade TBD.

04 INTERFACES & DATUMS

A: centre axis. B: soil at cup rim.
Cup removable; seed / water zones isolated.
Cup OD32 / well ID34 (P).
Radial cup clearance: 1 mm (P).


05 PROTOTYPE CHECKS

Drainage and root passage clearance.
Sealing, refill access and cleaning.
Material suitability and component fit.
Measure usable capacity after assembly.

STATUS: CONCEPT / VALIDATION PENDING


03 ORTHOGRAPHIC STUDIES / NOMINAL SECTIONS IN mm

FRONT / 64 OD x 110 H




Envelope: DIA 64 x 110 H

TOP / ANNULAR SECTION



Cavity: DIA 54 OD / DIA 36 ID

SIDE / 110 OVERALL H

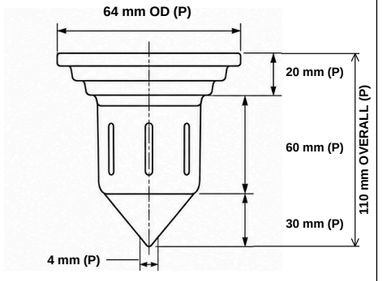


Cup: DIA 30 ID x 25 H


All values in mm / (P) = preliminary / NTS

SIDE (P): 20 + 60 + 30 = 110 mm; exit: 4 mm


05 INSTALLATION SEQUENCE




1 FILL WATER



2 PLACE SEED



3 BURY



4 CHECK

DRAWING / REVISION	TITLE	STATUS	REVISION DATE	FORMAT / SCALE / UNITS	COLLECTION SHEET
AGR-01 / P01	BIJAPOD	PRELIMINARY CONCEPT / CAD & TRIALS PENDING	10 NOV 2026	A3 / NTS / mm	01 / 28