AGRIVIVE / APATANI-LOCK

ARUNACHAL PRADESH / APATANI-INSPIRED / PADDY BUND OVERFLOW MODULE

SERIES 02 / 28

A3 / PRELIMINARY / ALL DIMENSIONS mm




STATE CONTEXT / INDIGENOUS INSPIRATION

The Apatani landscape at Ziro combines wet-rice and fish cultivation with community-managed irrigation channels. APATANI-LOCK proposes a small serviceable bund outlet inspired by that setting; fish safety and discharge remain untested.

Practice source: Apatani Cultural Landscape - UNESCO Tentative List (State Party submission) | Outline: geoBoundaries / schematic

01 INSTALLED SOIL / WATER SECTION

NOMINAL ENVELOPE / mm: 120 W x 80 D x 180 H

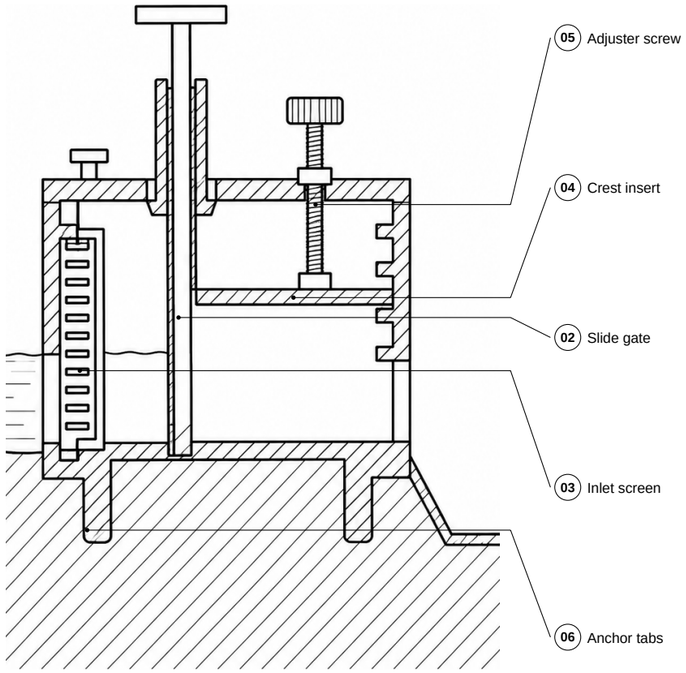


DESIGN / OPERATION NOTES

Seat the housing in a trial bund and set the adjustable crest.
Lift the slide clear of the flow window before allowing water through.
Screen spacing, gate clearance and downstream route require site assessment.

02 EXPLODED ASSEMBLY

ASSEMBLED ENVELOPE / mm
120 W x 80 D x 180 H

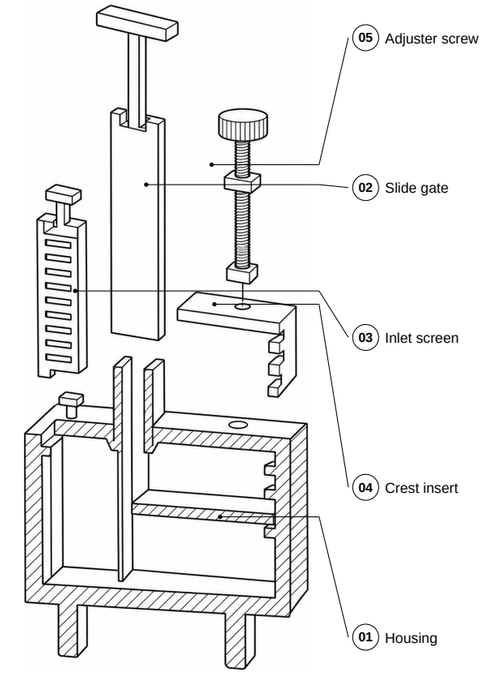


DESIGN / OPERATION NOTES

Components separated for service and assembly.
Connections and mating fits require CAD.

04 INTERNAL SECTION

SECTION BASIS / mm
20 anchor projection additional; clear flow window 80 W x 50 H

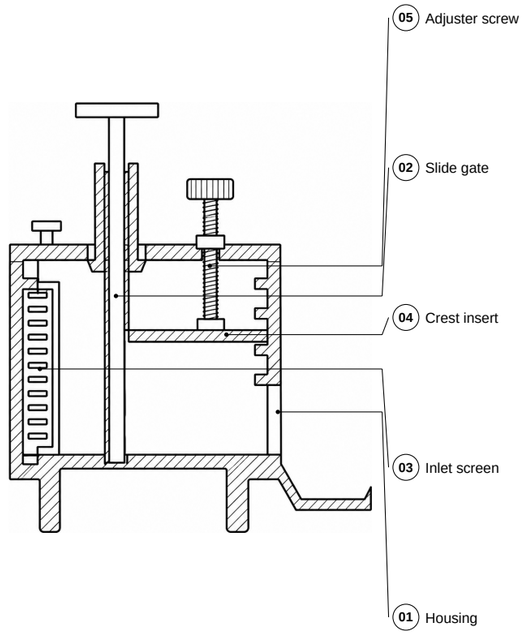

DESIGN / OPERATION NOTES

Lift the slide clear of the flow window before allowing water through.
Screen spacing, gate clearance and downstream route require site assessment.

DESIGN / INTERFACE SCHEDULE

01 NOMINAL GEOMETRY

Frame W x D x H
120 x 80 x 180

Anchor extension
20

Clear window W x H
80 x 50

02 GEOMETRIC CHECK

CLEAR RECTANGULAR WINDOW

4,000.0 mm2

80 x 50
Opening area does not establish discharge

03 PARTS / QTY

01 Housing	**1**
02 Slide gate	**1**
03 Inlet screen	**1**
04 Crest insert	**1**
05 Adjuster screw	**1**
06 Anchor tabs	**Integral**

Housing: candidate polymer. Screen, screw and retention material TBD.

04 INTERFACES / CHECKS


Test leakage, clogging and bund stability.

Confirm suitable screen spacing for the intended setting.

Measure discharge at actual crest and gate positions.

PRELIMINARY / VALIDATION PENDING


03 ORTHOGRAPHIC STUDIES / mm

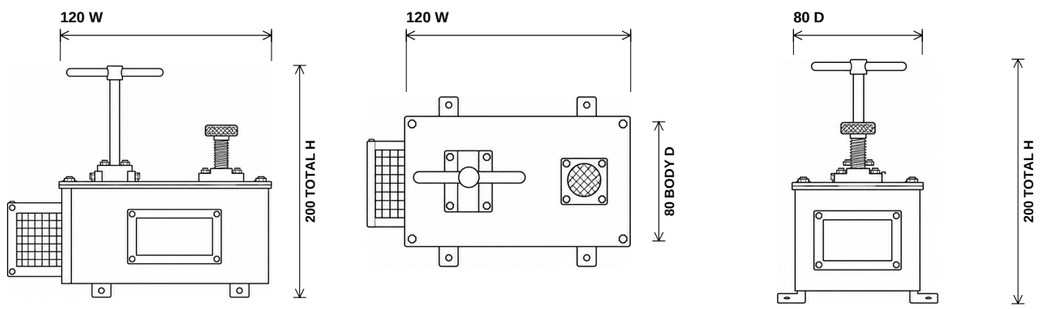

SIDE / HOUSING **TOP / HOUSING** **END / HOUSING**

Frame 120 W x 80 D x 180 H; anchor projection 20 additional. Clear flow window 80 W x 50 H.

05 INSTALLATION / OPERATING SEQUENCE

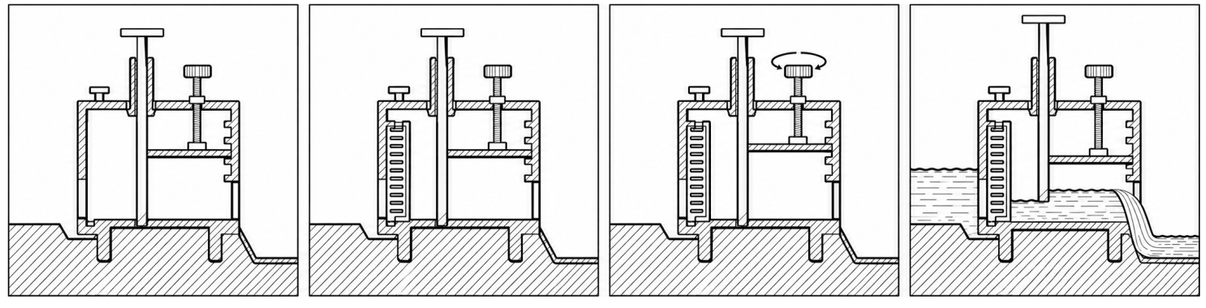

1 SEAT HOUSING **2 FIT SCREEN** **3 SET CREST** **4 OPEN / INSPECT**

Concept sequence; validate fit, access and operating conditions in prototypes.

DRAWING / REVISION	TITLE	STATUS	REVISION DATE	FORMAT / SCALE / UNITS	COLLECTION SHEET
AGR-02 / P01	APATANI-LOCK	PRELIMINARY CONCEPT / CAD & TRIALS PENDING	10 NOV 2026	A3 / NTS / mm	02 / 28