AGRIVIVE / NAULA-CORE

UTTARAKHAND / NAULA-INSPIRED / PROTECTED SEEP INTAKE

SERIES 27 / 28

A3 / PRELIMINARY / ALL DIMENSIONS mm




STATE CONTEXT / INDIGENOUS INSPIRATION

Naulas are protected spring-water collection structures in Uttarakhand. NAULA-CORE proposes a removable gravel-cartridge intake for a trial seep; it does not establish drinking-water safety.

Practice source: NIHE: Naula spring-water study, Kumaon Himalaya | Outline: geoBoundaries / schematic

01 INSTALLED SOIL / WATER SECTION

NOMINAL ENVELOPE / mm: 100 chamber OD x 180 overall H

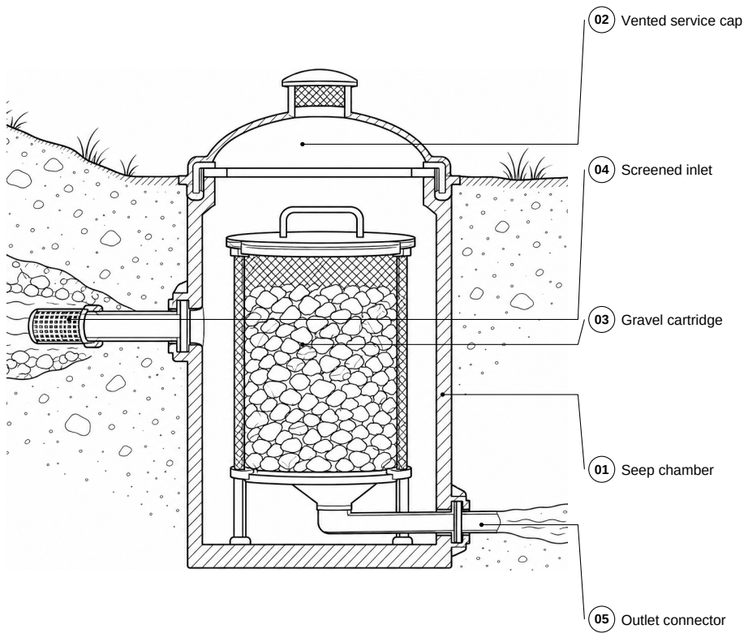


DESIGN / OPERATION NOTES

Position intake only after assessing the seep and its surroundings.
Fit a mesh-lined gravel cartridge and protected service cap.
Connect the low gravity outlet; inspect source quality independently.

02 EXPLODED ASSEMBLY

ASSEMBLED ENVELOPE / mm
100 chamber OD x 180 overall H

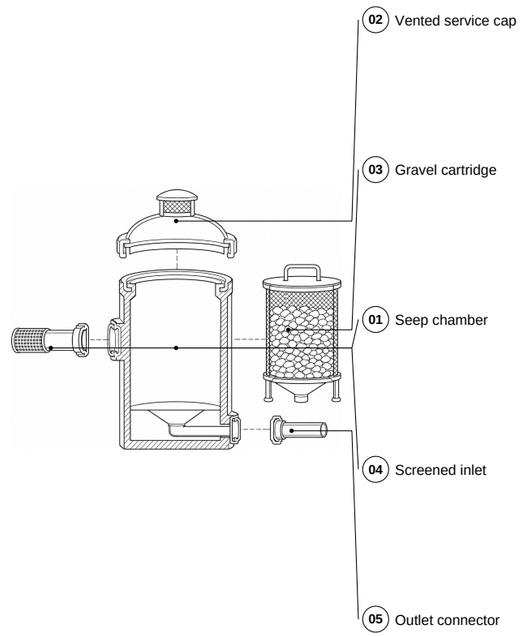


DESIGN / OPERATION NOTES

Components separated for service and assembly.
Connections and mating fits require CAD.

04 INTERNAL SECTION

SECTION BASIS / mm
90 media-chamber ID x140 H; inlet40 ID; outlet25 ID

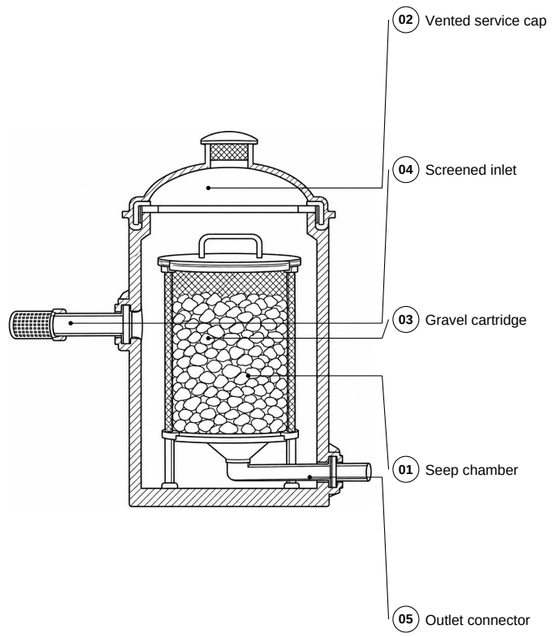

DESIGN / OPERATION NOTES

Fit a mesh-lined gravel cartridge and protected service cap.
Connect the low gravity outlet; inspect source quality independently.

DESIGN / INTERFACE SCHEDULE

01 NOMINAL GEOMETRY

Chamber OD / overall H	**100 / 180**
Media ID / clear H	**90 / 140**
Inlet ID / outlet ID	**40 / 25**

02 GEOMETRIC CHECK

GROSS MEDIA-CHAMBER ENVELOPE

890.6 mL

pi/4 x 90^2 x 140 / 1000
Media displaces volume; not a potable-water purifier

03 PARTS / QTY

01 Seep chamber	**1**
02 Vented service cap	**1**
03 Gravel cartridge	**1**
04 Screened inlet	**Integral**
05 Outlet connector	**1**

Chamber/cap: candidate polymer. Cartridge: mesh + gravel, grading TBD. Outlet seal TBD.

04 INTERFACES / CHECKS

Assess source protection and water quality separately.

Test clogging, soil ingress and cartridge removal.


Measure media void volume and outlet behaviour.

05 DATUMS / DRAWING BASIS

A: chamber axis. B: outlet invert. Protect the cap and cartridge access.

PRELIMINARY / VALIDATION PENDING


03 ORTHOGRAPHIC STUDIES / mm

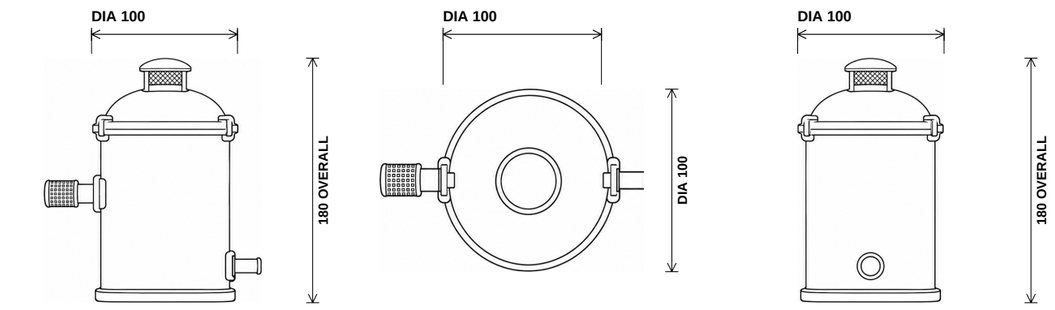

FRONT / CHAMBER **TOP / CHAMBER** **SIDE / CHAMBER**

Chamber DIA 100 x 180 H; gross media envelope DIA 90 x 140 H. Inlet DIA 40 / outlet DIA 25 ID.

05 INSTALLATION / OPERATING SEQUENCE

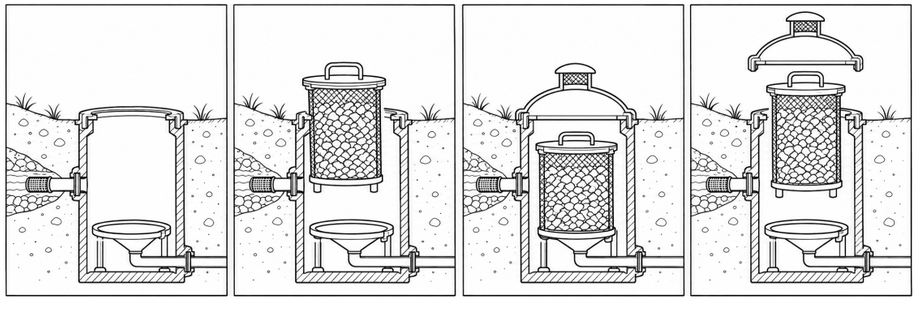

1 SELECT SEEP **2 FIT CARTRIDGE** **3 CAP / CONNECT** **4 REMOVE / INSPECT**

Concept sequence; validate fit, access and operating conditions in prototypes.

DRAWING / REVISION	TITLE	STATUS	REVISION DATE	FORMAT / SCALE / UNITS	COLLECTION SHEET
AGR-27 / P01	NAULA-CORE	PRELIMINARY CONCEPT / CAD & TRIALS PENDING	10 NOV 2026	A3 / NTS / mm	27 / 28