AGRIVIVE / BHERI-CYCLE

WEST BENGAL / BHERI-CONTEXT / SCREEN AND LEVEL-CREST MODULE

SERIES 28 / 28

A3 / PRELIMINARY / ALL DIMENSIONS mm




STATE CONTEXT / INDIGENOUS INSPIRATION

Bheris in the East Kolkata Wetlands are part of a wider resource-recovery aquaculture landscape. BHERI-CYCLE proposes only a small screen and pond-level crest module; no wastewater treatment or fish-production performance is claimed.

Practice source: East Kolkata Wetlands Management Authority: Ramsar designation | Outline: geoBoundaries / schematic

01 INSTALLED SOIL / WATER SECTION

NOMINAL ENVELOPE / mm: 120 W x80 D x200 H

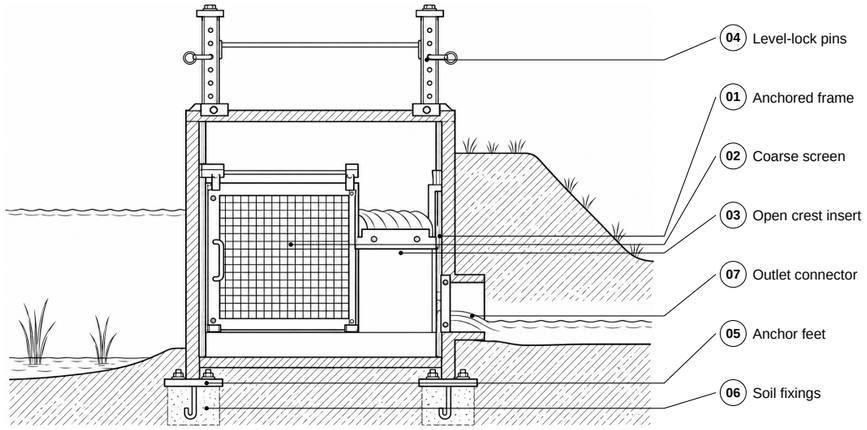


DESIGN / OPERATION NOTES

Seat frame with screen upstream and an open downstream route.
Fit the crest insert and secure the selected level setting.
Remove screen debris and inspect downstream backwater conditions.

02 EXPLODED ASSEMBLY

ASSEMBLED ENVELOPE / mm
120 W x80 D x200 H

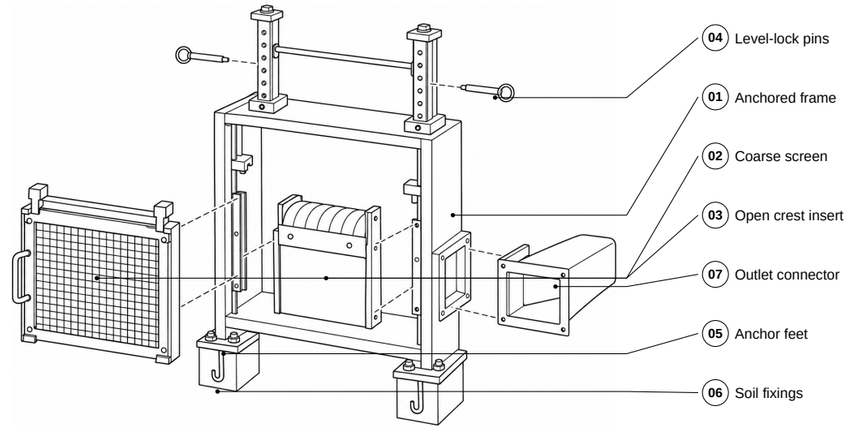


DESIGN / OPERATION NOTES

Components separated for service and assembly.
Connections and mating fits require CAD.

04 INTERNAL SECTION


SECTION BASIS / mm
30 anchor extension; clear screen window60 W x40 H

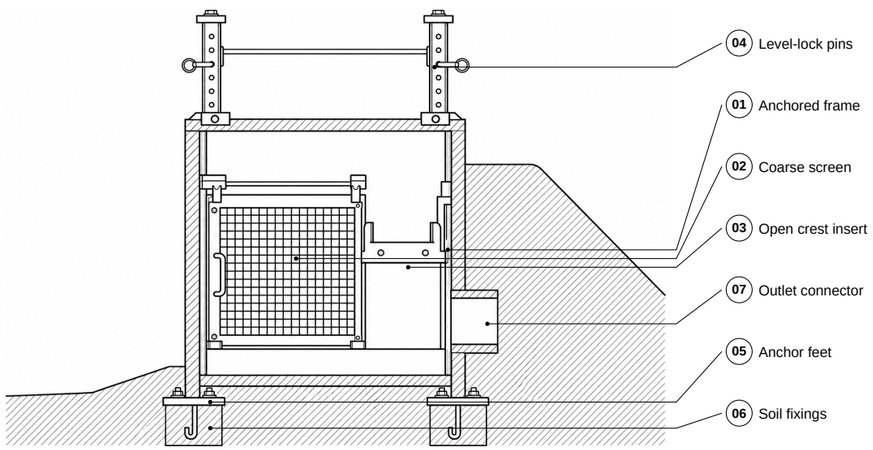

DESIGN / OPERATION NOTES

Fit the crest insert and secure the selected level setting.
Remove screen debris and inspect downstream backwater conditions.


03 ORTHOGRAPHIC STUDIES / mm

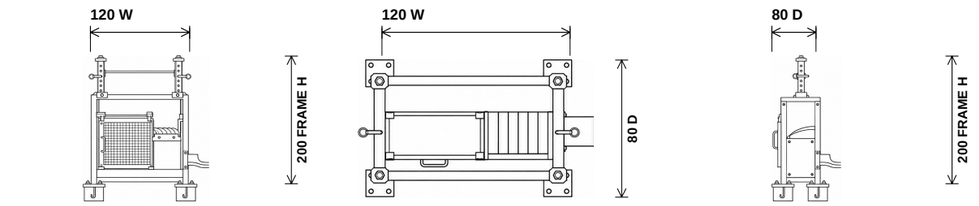

FRONT / FRAME **TOP / FRAME** **SIDE / FRAME**

Frame 120 W x 80 D x 200 H; anchor extension 30 additional. Clear screen window 60 W x 40 H.

05 INSTALLATION / OPERATING SEQUENCE

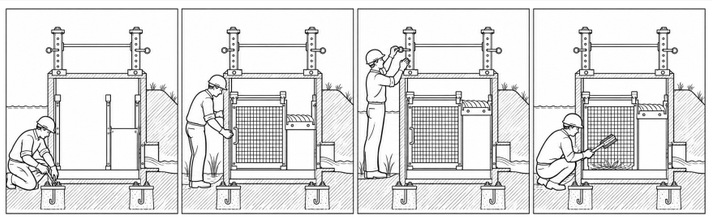

1 SEAT FRAME **2 FIT SCREEN** **3 SET CREST** **4 CLEAN / INSPECT**

Prototype fit, access and operation require trials.

DESIGN / INTERFACE SCHEDULE

01 NOMINAL GEOMETRY

Frame W x D x H	**120 x 80 x 200**
Clear window W x H	**60 x 40**
Anchor extension	**30**

02 GEOMETRIC CHECK

GROSS FRAME WINDOW AREA

2,400.0 mm2

60 x 40
Before mesh obstruction; no wastewater-treatment claim

03 PARTS / QTY

01 Anchored frame	**1**
02 Coarse screen	**1**
03 Open crest insert	**1**
04 Level-lock pins	**2**
05 Anchor feet	**2 integral**
06 Soil fixings	**2**
07 Outlet connector	**1**

Frame/crest: polymer candidate. Screen / hardware grades TBD.

04 INTERFACES / CHECKS

Test screen clogging and bypass around frame.

Check crest-setting retention and leakage.

Assess source water and pond management separately.

PRELIMINARY / VALIDATION PENDING

DESIGN DEVELOPMENT RECORD

01 / GEOMETRY
Nominal body sizes are proposed. Generated views are illustrative; small features and interfaces may vary.

02 / BEFORE FABRICATION
Develop one CAD model, assign wall thicknesses, tolerances and mating fits. Check print orientation and service access.

03 / TRIAL RECORD
Measure dimensions and retained volume or opening area. Record leakage, clogging and soil anchorage under observed conditions.

No discharge, treatment or durability performance is established.

DRAWING / REVISION	TITLE	STATUS	REVISION DATE	FORMAT / SCALE / UNITS	COLLECTION SHEET
AGR-28 / P01	BHERI-CYCLE	PRELIMINARY CONCEPT / CAD & TRIALS PENDING	10 NOV 2026	A3 / NTS / mm	28 / 28